




INSTALL A/V PRODUCT CATALOG 2010

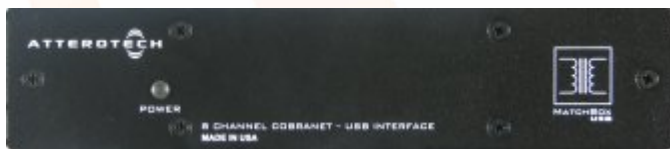

VoiceBox 4 I/O

The VoiceBox 4 I/O CobraNet Audio Interface is a cost effective 4 in / 4 out mic/line preamp. The VoiceBox 4 I/O features 4 balanced inputs, with both gain and +12V phantom power selectable on a per channel basis and 4 line level balanced outputs. All outputs can contain any mix of local and network audio inputs. An RS-232 port enables the transmission of serial data from any VoiceBox 4 I/O to any other CobraNet device supporting a serial bridge connection on a CobraNet system.



connected by
CobraNet

- Full CobraNet connectivity in a half-rack format
- Fully balanced inputs and outputs with high quality, depluggable connectors
- +12V Phantom Power, switchable per channel
- Input gain selection for line (0dB), electret mics (+30dB), and dynamic mics (+50dB)
- DSP audio signal processing on inputs and outputs. For OEM applications, Atterotech can implement custom signal processing
- RS-232 connector for transmission of serial data between VoiceBox 4 I/Os using CobraNet serial bridging
- Enclosure size is 1.5”H x 7.25”W x 6.5”D
- Part Number - 900-00103-01

MatchBox USB

Multi-media PCs are becoming more important as media sources, not only in home settings, but in a variety of commercial audio installation settings as well. The MatchBox USB is a cost-effective general purpose solution for direct integration of media PC audio streams into and/or back from a CobraNet-based system. The MatchBox USB appears to the PC as a USB Sound Card and can be configured for 8 channels of audio in various input and output modes.



connected by
CobraNet

- Full CobraNet connectivity in a half rack format
- USB Plug-n-Play installation, Full Speed (12.1 Megabits/sec) communication
- Full compliant with USB Audio 1.0 Standards
- Ability to route:

PC to Network	Stereo Pairs	Network to PC	Stereo Pairs
8 Audio Channels	4		
6 Audio Channels	3	2 Audio Channels	1
4 Audio Channels	2	4 Audio Channels	2

- Compatible with most standard PC audio applications (e.g. Media Player, Winamp, Sound Recorder, etc.)
- Enclosure size is 1.5”H x 7.25”W x 6.5”D
- Part Numbers -
 - 900-00110-01 - 4x2 North America
 - 900-00110-02 - 4x2 Europe
 - 900-00122-01 - 1x8 North America
 - 900-00122-02 - 1x8 Europe

InBox X2

The InBox X2 CobraNet Audio Input Interface is a cost effective two input, mic/line level wall box. The X2 features switchable mic/line gain, switchable +12V phantom power, and clipping indicators for each channel. The X2 is designed to fit into a standard dual gang junction box and is PoE enabled, so all connectivity (both power and audio data) to the X2 is provided by a single CAT-5 cable.



connected by
CobraNet

- Features two balanced female XLR/TRS combo input connectors
- Mounts in a standard dual gang junction box
- Input gain selection for line (0dB) and mic (+30dB), switchable per channel
- +12V Phantom Power, switchable per channel
- Bicolor (yellow/red) clipping indicators for -6dB below full scale and clipping per channel
- PoE powered from a standard PoE network switch
- Enclosure size is 2.75"H x 3.5"W x 1.875"D
- Part Numbers -
 - 900-00106-03 - White ABS
 - 900-00106-05 - Black ABS

InBox R8

The InBox R8 CobraNet Audio Input Interface is a cost effective eight input, line level wall box. The R8 features eight unbalanced RCA inputs, which can be used as either eight mono inputs or four stereo inputs. The R8 is designed to fit into a standard dual gang junction box and is PoE enabled, so all connectivity (both power and audio data) to the R8 is provided by a single CAT-5 cable.



connected by
CobraNet

- Features eight unbalanced RCA input connectors
- Mounts in a standard dual gang junction box
- RCA inputs may be used in mono mode (8 in) or in stereo mode (4 in)
- PoE powered from a standard PoE network switch
- Enclosure size is 2.75"H x 3.5"W x 1.875"D
- Part Numbers -
 - 900-00108-02 - White ABS
 - 900-00108-04 - Black ABS

OutBox X2

The OutBox X2 CobraNet Audio Output Interface is a cost effective two output line level wall box. The X2 features two balanced outputs. The X2 is designed to fit into a standard dual gang junction box and is PoE enabled, so all connectivity (both power and audio data) to the X2 is provided by a single CAT-5 cable.



connected by
CobraNet

- Features two balanced male XLR output connectors
- Mounts in a standard dual gang junction box
- PoE powered from a standard PoE network switch
- Enclosure size is 2.75"H x 3.5"W x 1.875"D
- Part Numbers -
 - 900-00107-02 - White ABS
 - 900-00107-04 - Black ABS

OutBox R8

The OutBox R8 CobraNet Audio Output Interface is a cost effective eight output, line level wall box. The R8 features eight unbalanced RCA outputs, which can be used as either eight mono outputs or four stereo outputs. The R8 is designed to fit into a standard dual gang junction box and is PoE enabled, so all connectivity (both power and audio data) to the R8 is provided by a single CAT-5 cable.



connected by
CobraNet

- Features eight unbalanced RCA output connectors
- Mounts in a standard dual gang junction box
- RCA outputs may be used in mono mode (8 out) or in stereo mode (4 out)
- PoE powered from a standard PoE network switch
- Enclosure size is 2.75"H x 3.5"W x 1.875"D
- Part Numbers -
 - 900-00109-02 - White ABS
 - 900-00109-04 - Black ABS

InBox M3

The InBox M3 CobraNet Audio interface is a cost effective multi-input wall box. The M3 features a balanced XLR input, a pair of RCA inputs, and a stereo minijack input. All five inputs can be used simultaneously and all audio channels are available separately. The M3 is designed to fit into a standard dual gang junction box and is PoE enabled, so all connectivity (power and data) is provided by a single CAT-5 cable.



connected by
CobraNet

- Features one XLR/TRS balanced input featuring Mic/line switch and clipping LED
- Two unbalanced RCA input connectors
- One stereo minijack connector
- PoE powered from a standard PoE network switch
- Enclosure size is 2.75"H x 3.5"W x 1.875"D
- Part Numbers -
 - 900-00127-01 - White ABS
 - 900-00127-02 - Black ABS

Accessories

MatchBox USB Accessories

- | | |
|-----------------------|--|
| Single Rack Mount Kit | A 1RU rack kit designed to mount one MatchBox USB.
Part Number: 900-00104-01 |
| Double Rack Mount Kit | A 1RU rack kit designed to mount two MatchBox USBs.
Part Number: 900-00105-01 |

VoiceBox 4 I/O Accessories

- | | |
|-----------------------|--|
| Single Rack Mount Kit | A 1RU rack kit designed to mount one VoiceBox 4 I/O
Part Number: 900-00124-01 |
| Dual Rack Mount Kit | A 1RU rack kit designed to mount two VoiceBox 4 I/Os.
Part Number: 900-00125-01 |
| Quad Rack Mount Kit | A 2RU rack kit designed to mount 4 VoiceBox 4 I/Os.
Part Number: 900-00126-01 |